


(汇流箱)



Features

- ★ Protection degree is IP54. Suitable for indoor and outdoor use.
- ★ Surge protection on both positive and negative inputs
- ★ Support multiple configurations: 8, 16, 24, 32 positive and negative inputs
- ★ DC voltage can be up to 1000V

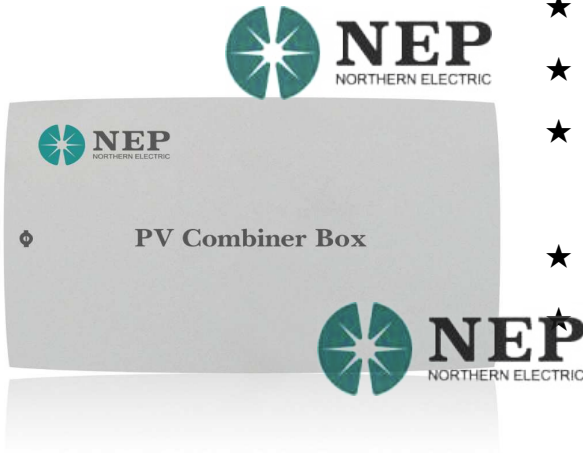


All input current and voltage can be monitored in real time
 Support multiple communication protocols, including RS232, RS485, Ethernet, Zigbee etc. Multiple combiner boxes can be connected within a communication network.

Intelligent PV Combiner Boxes

(BDC-8/BDC-16/BDC-24/BDC-32)



	BDC-8	BDC-16	BDC-24	BDC-32
PV Voltage	400 ~ 1000(Vdc)			
Number of inputs	8	16	24	32
Max. Input Fuse Rating	10A 			
Protection	IP54			
Environment Temperature	-25 ~ +55°C			
Environment Humidity	0 ~ 99%			
Surge Protection	yes			
Communication	RS485/RS232, ZIGBEE (optional)			
Size (mm)	450*360*150	450*460*150	650*660*200	850*660*200