





BDM 600-LV (BDM-300X2) MICROINVERTER



Features

- Designed for single phase AC (120 Vac)
- Low cost \$/watt micro inverter
- Built-in AC cable for easy installation
- High peak output power up to 550Wac, recommended for dual max 370W solar panel
- High efficiency with 95.5% CEC
- Globally certified for UL1741, SAA, TUV, VDE.AR.N 4105, VDE 0126, G83/2, CEI 021, IEC61727, EN50438
- Integrated grounding for easy installation
- NEMA-6/IP-66/IP-67 enclosure rating
- Integrated monitoring and power line communication with BDG-256 gateway
- Can connect with BDM-300 an BDM-250-LV

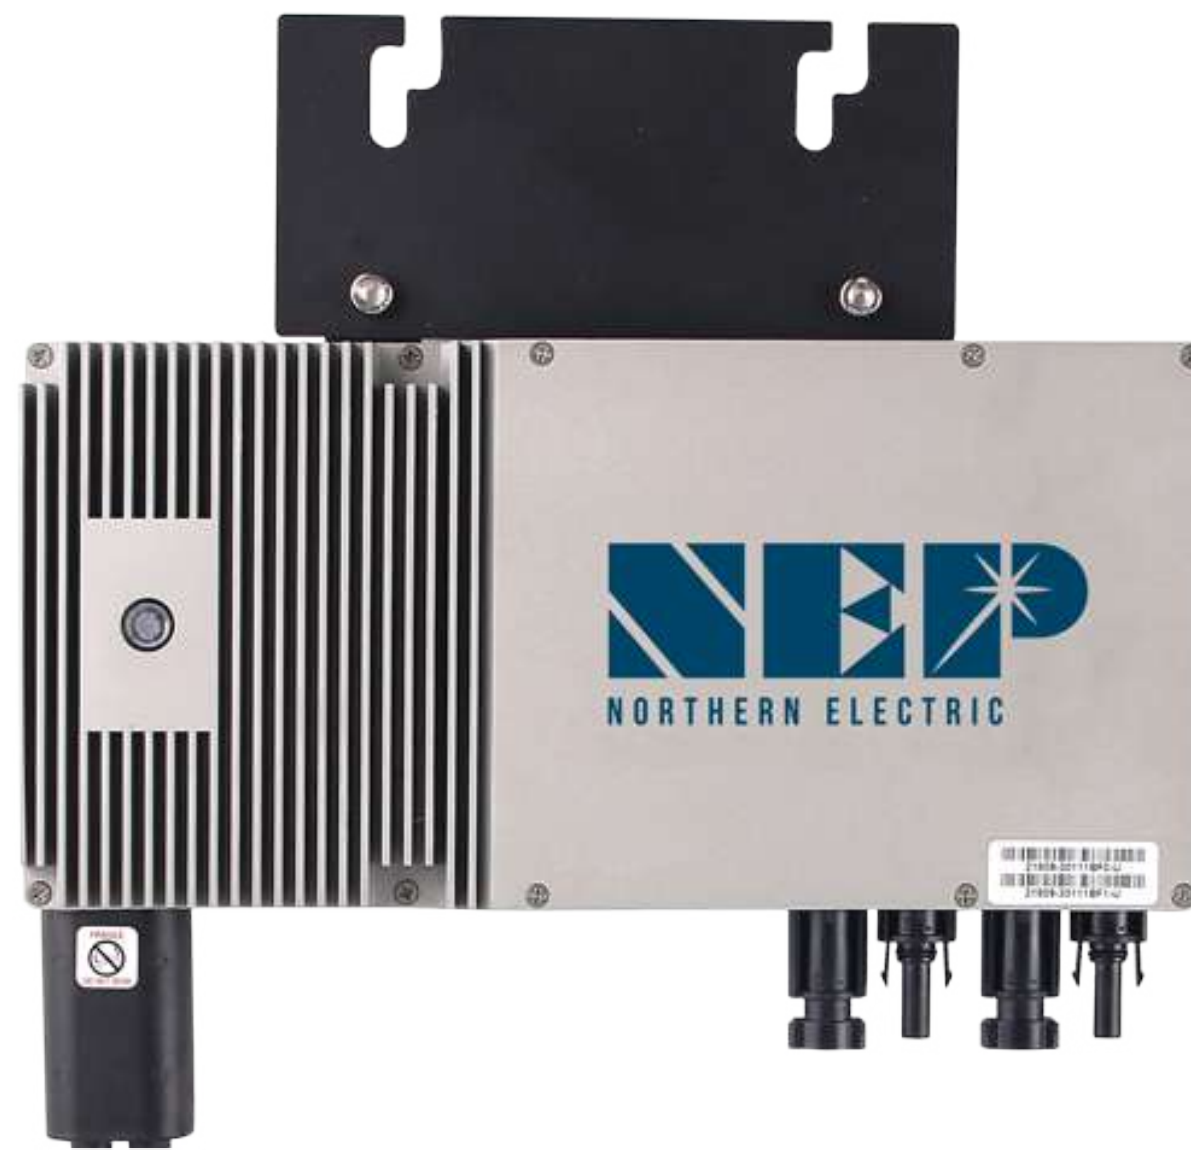



northernep.com




10.91"

1.97"

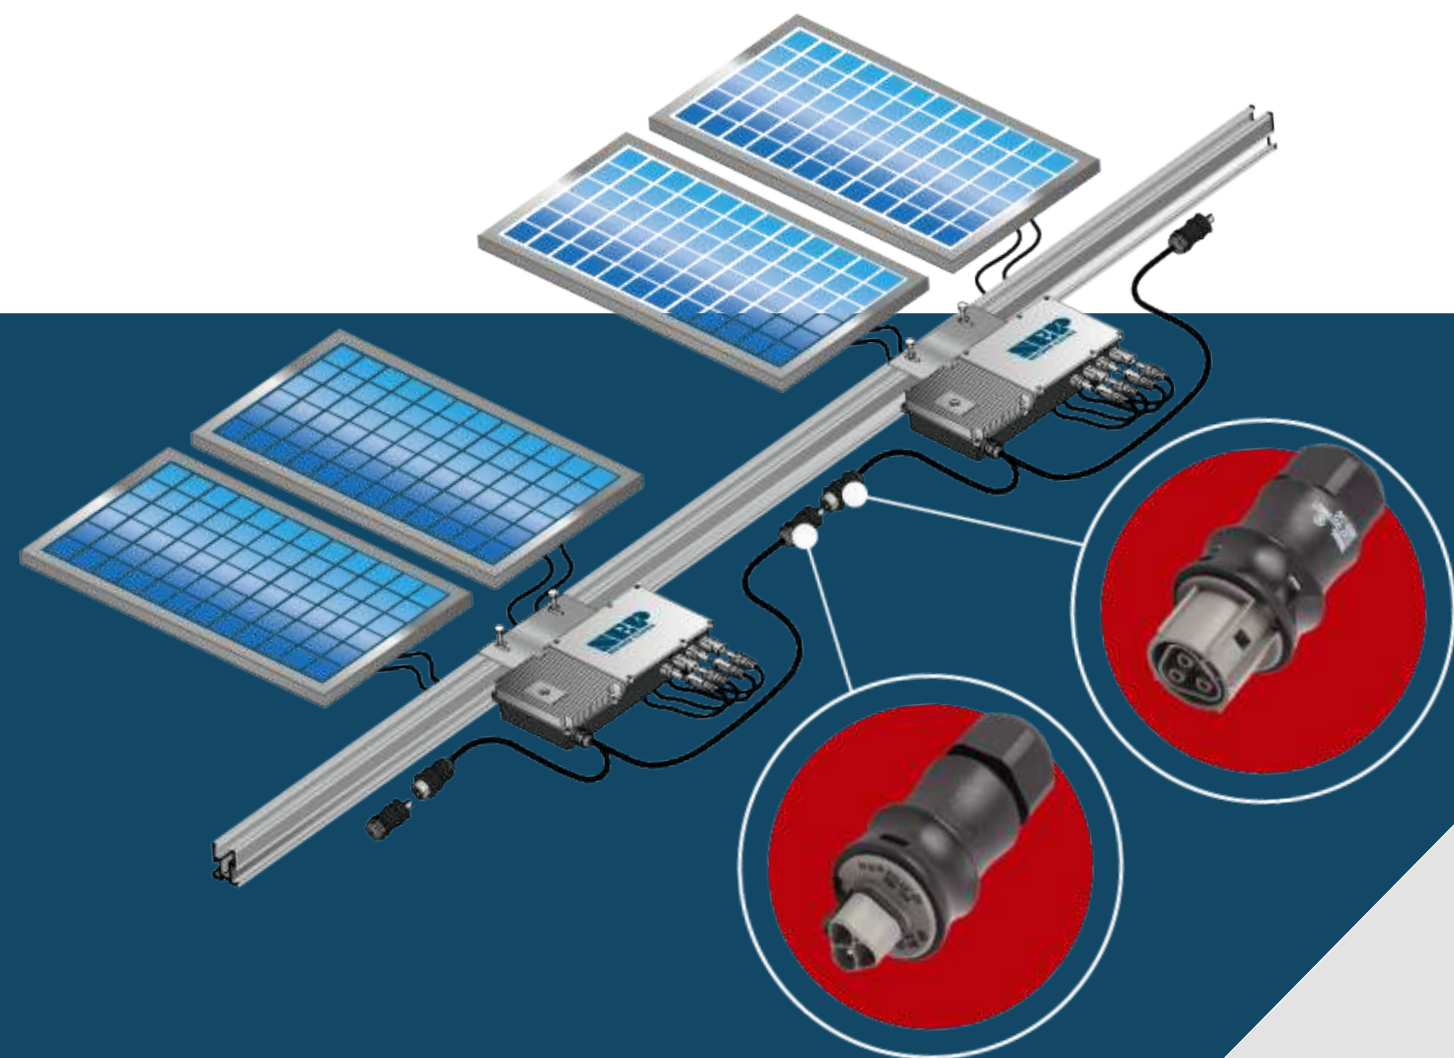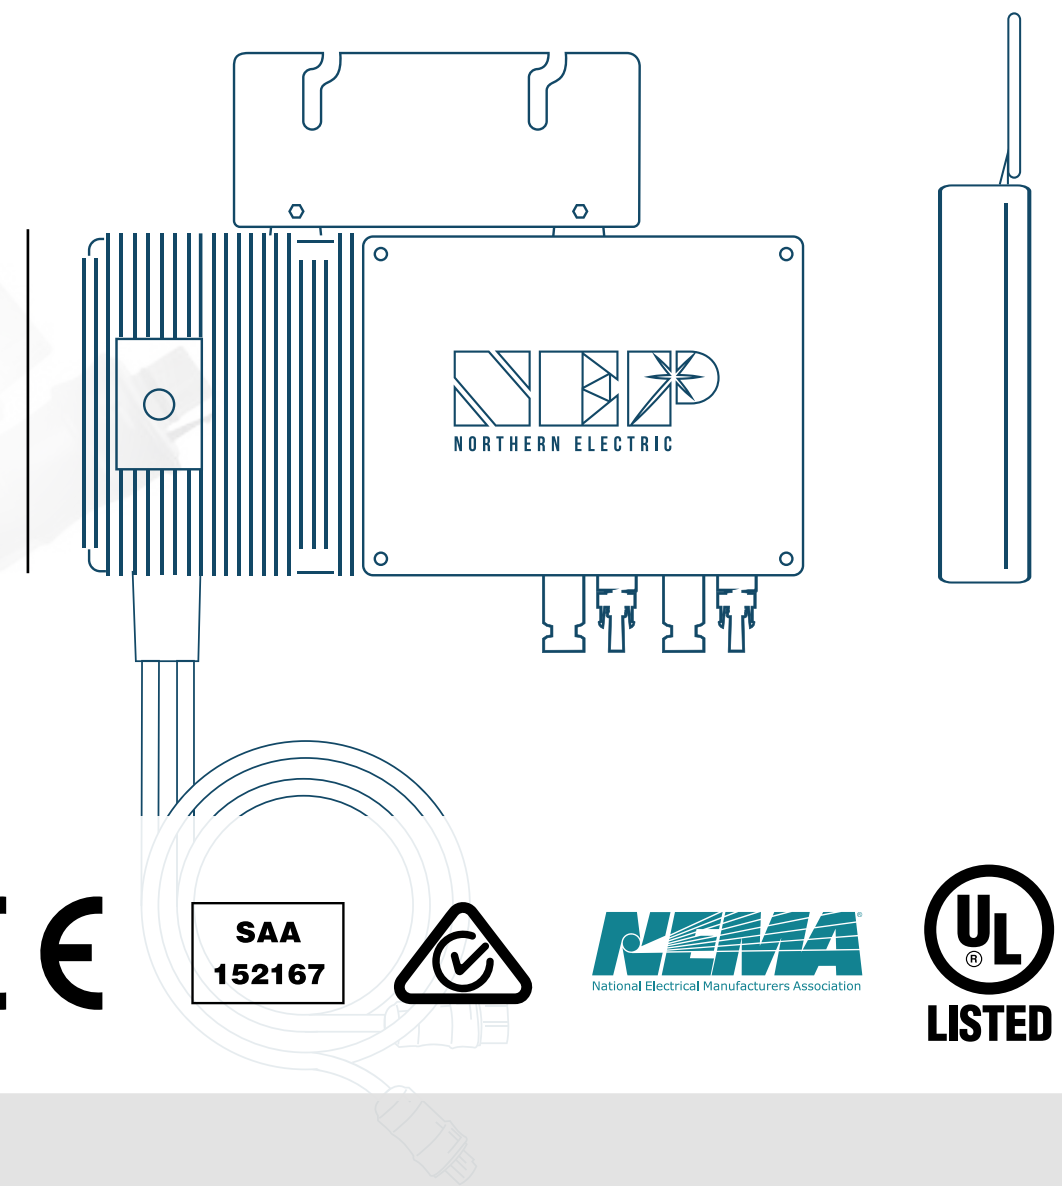

Important product date

- NEP is committed to developing Clean, Reliable, Convenient and Efficient (CARE) products for our customers worldwide. Our products have a 10-year warranty.
- NEP microinverters have an isolation transformer and basic isolation between the DC input and the AC output network.

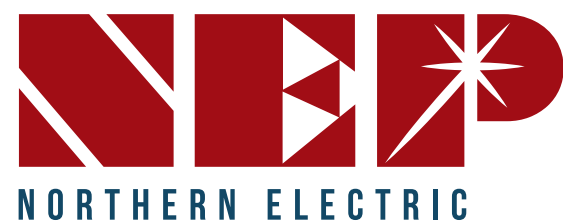

BDM 600-LV (BDM-300X2) MICROINVERTER



* Grid parameters are configurable through a BDG-256 or BDG-256P3 gateway
 * All NEC required adjustment factors have been considered for AC outputs. AC current outputs will not exceed stated values for Rated Output AC Current

COMPLIANCE

*NEC 2014 Section 690.11 DC Arc-Fault Circuit Protection
 *NEC 2014 Section 690.12 Rapid Shutdown of PV Systems on Buildings
 *NEC 2014 Section 705.12 Point of Connection (AC Arc-Fault Protection)

INPUT(DC)	Recommended Max PV Power (Wp)	385 x 2		
	Max DC Open Circuit Voltage (Vdc)	60		
	Max DC Input Current (Adc)	12 x 2		
	MPPT Tracking Accuracy	>99.5%		
	MPPT Tracking Range (Vdc)	22-55		
	Isc PV (absolute maximum) (Adc)	14 x 2		
Maximum Inverter Backfeed Current to the Array (Adc)	0			
OUTPUT (AC)	Peak AC Output Power (Wp)	550		
	Rated AC Output Power (Wp)	500		
	Nominal Power Grid Voltage (Vac)	127		
	Allowable Power Grid Voltage (Vac)	100-140*		
	Allowable Power Grid Frequency (Hz)	59.3 a 60.5		
	THD	<3% (at rated power)		
	Power Factor (cos phi, fixed)	>0.99%		
	Rated Output Current (Aac)	3.93		
	Current (inrush)(Peak and Duration)	24A, 15us		
	Nominal Frequency (Hz)	60		
	Maximum Output Fault Current (Aac)	8.8A peak		
	Maximum Output Overcurrent Protection (Aac)	20		
	Maximum Number of Units Per Branch (20A circuit)	4		
	SYSTEM EFFICIENCY	Weighted Averaged Efficiency (CEC)	95.5%	
Night Time Tare Loss (Wp)		0.11		
PROTECTION FUNCTIONS	Over/Under Voltage Protection	Yes		
	Over/Under Frequency Protection	Yes		
	Anti-Islanding Protection	Yes		
	Over Current Protection	Yes		
	Reverse DC Polarity Protection	Yes		
	Overload Protection	Yes		
	Protection Degree	NEMA-6 / IP-66 / IP-67		
	Ambient Temperature	-40°F to +149°F (-40°C to +65°C)		
	Operating Temperature	-40°F to +185°F (-40°C to +85°C)		
	Display	LED LIGHT		
	Communications	Power Line		
	Dimension (W-H-D)	10.91"x5.20"x1.97"(277x132x50 mm)		
	Weight	8.8 lbs. (4.0 kg)		
	Environment Category	Indoor and outdoor		
	Wet Location	Suitable		
	Pollution Degree	PD 3		
	Overvoltage Category	II(PV), III (AC MAINS)		
	Product Safety Compliance	California Rule 21 Certified UL 1741 CSA C22.2 No. 107.1	IEC/EN 62109-1 IEC/EN 62109-2	
		Grid Code Compliance* (Refer to the label for the detailed grid code compliance)	IEEE 1547	VDE-AR-N 4105* VDE V 0126-1-1/A1 G83/2, CEI 021 AS 4777.2 & AS 4777.3,EN50438